

PREPARING THE LUMINAIRE

SURFACE LUMINAIRE: BL700S "LED"


SAVE THIS INSTRUCTIONS

READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE INSTALLATION. IF YOU ARE NOT FAMILIAR WITH THE NATIONAL ELECTRICAL CODE (NEC), CONTACT A QUALIFIED ELECTRICIAN TO INSTALL THIS LUMINAIRE.


WARNING.- Before installing this luminaire or doing any maintenance, turn off the power supply at the circuit breaker or fuse box. Turning the power off using the light switch is not sufficient to prevent electrical shock.

NOTE:


To re-lamp, replacement parts or additional information, contact or visit manufacturer at www.lumux.net

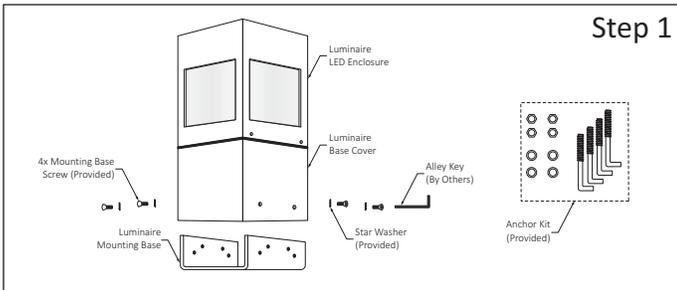


Step 1 - Disassemble Luminaire Parts for easy Installation:
a.- Remove Luminaire Mounting Base from Base Cover.

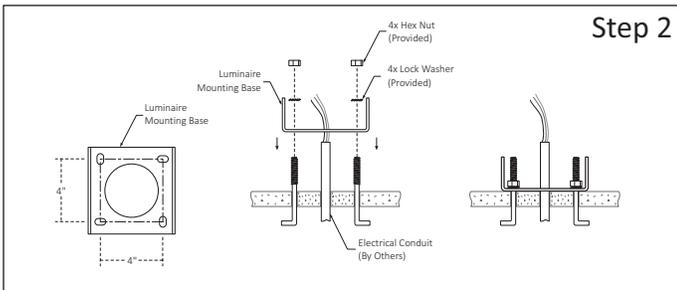


Step 2 - Install Luminaire Mounting Base:
a.- Arrange Anchors Locations, Installer may use the Mounting Base to set the hole pattern.
b.- Insert Luminaire Mounting Base on the Anchorage and fasten using the Lock Washers and Hex Nuts Provided.

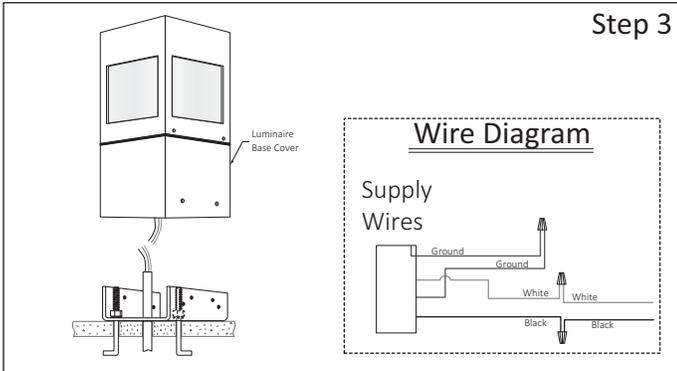


Step 3 - Make Wiring Connections:
a.- Place Luminaire Base close to the Mounting Base and make hard-wire connections, see Wire Diagram.

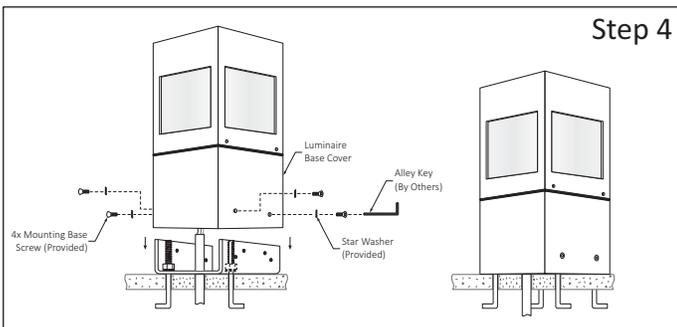

Step 4 - Install Luminaire Base Cover:
a.- Insert Luminaire Base Cover to the Mounting Base, align the four holes and secure it using the four Washers and Screws (provided).

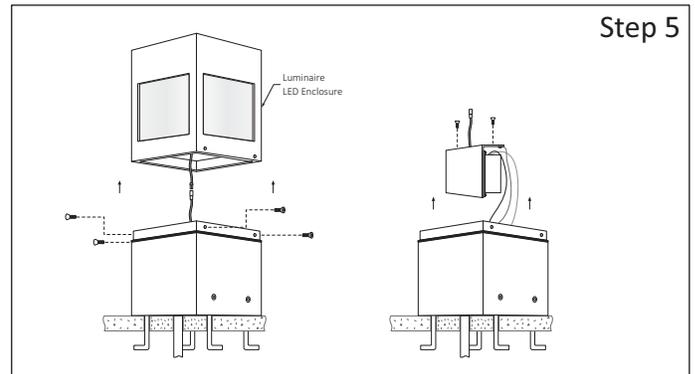

Step 5 - Access to Electric Components:
a.- Remove Luminaire LED Enclosure from the Base and disconnect plug.
b.- Do Service as require.

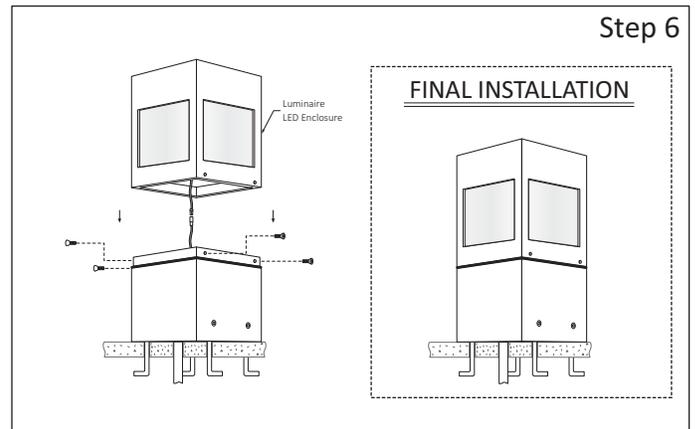

Step 6 - Install Luminaire LED Enclosure:
a.- Re-Connect the Plugs and place the Luminaire Enclosure onto the Base, align the four holes and secure it using the Screws (provided).