

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description : The BL400 Bollard / Marker luminaires is fabricated from a low copper aluminum die cast architecturally formed. With symmetrical distribution for lighting of landscaping, driveways, squares, pathways and entrances from a low mounting height. Unit is weather tight through its aluminum die cast top head fastened to its body via silicon gaskets and stainless steel Allen type screws. Unit's light source is by a 1-3 watt LED circuitry @ 80 lumen output per LED with its integral driver operating @ 120v or 277v input voltage. Anchor bolts are provided with each unit. This unit is utilizing polyester powder coat finishes for the unit's longevity @ the outdoor environment. ETL listed for wet locations.

SPECIFICATION:

Housing : Extruded aluminum. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.


Diffuser : Poly Carbonate.

Electrical : Voltage : 120 or 277
Lamp: 3 watt LED
Driver : Integral, class P, Electronic Driver

Installation:
Unit is provided with anchor bolts.

DIMENSIONS:

A : 32.0"
B : 10 1/2"

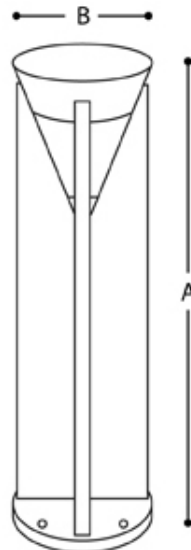

Lumux - BL400

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number BL400
--------------------	--------------	---------	-------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

BL400 / XXX / XXX / xxx

3 watt
LED *

120
277

White
Black
Silver
Bronze
RAL
(optional)

* The LED Light source comes with its integral driver @ 120 volt or 277 volt.

Lumux - BL400

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number
BL400