

Date :

Project :

Type:

Agency :

Distributor :



Description :

Recessed LED illuminated step light. This unit could be specified for indoor or outdoor application in 13.0' or 20.0" length. Unit is provided with its own Rough-in box for ease of installation. Body is constructed from extruded aluminum with its low copper aluminum die cast grill. The Rough-in box could be shipped in advance of the units' installation for any pre-concrete pour project. Designed for illumining of steps, stairs, ramps, aisles and any application where the slim design of the fixture and the longevity of its LED light source might be a factor. Unit's body is out of extruded aluminum with stainless steel hardware. Tempered clear flush glass. Unit is silicon gasketed for weather tight application. ETL listed for wet location.

SPECIFICATION:

Housing : Extruded aluminum.
 Vandal resistance stainless steel screws.
 Silicon gasketed for weather tight operation.

Diffuser : Frosty glass.


Electrical : Voltage : 120 or 277
 Lamp: LED

Installation:
 Polymer Rough-in box is provided with each unit.

Reflector : Symmetric or A-Symmetric.

L = 15.5" or 20.5", W = 3.0", H = 3.0"

DIMENSIONS:

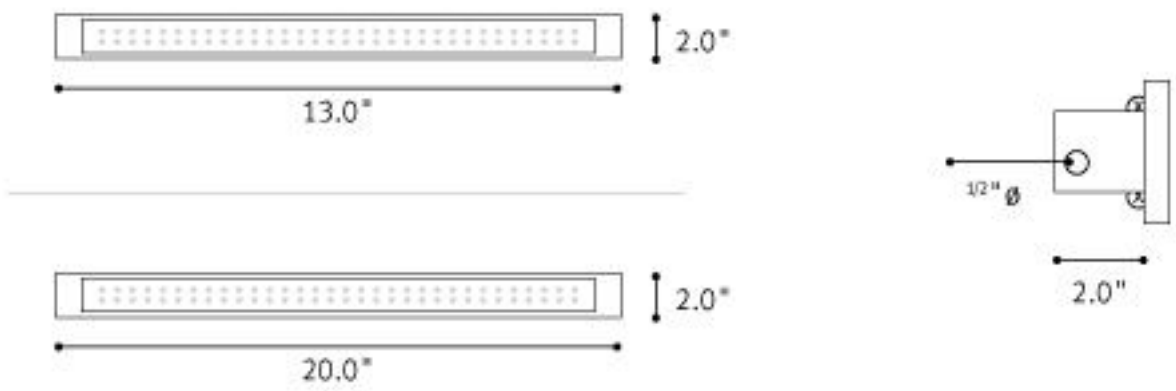

Lumux - SL1000

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : B	Drawing Number SL1000
--------------------	--------------	---------	--------------------------

LUMUX

Date :


Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

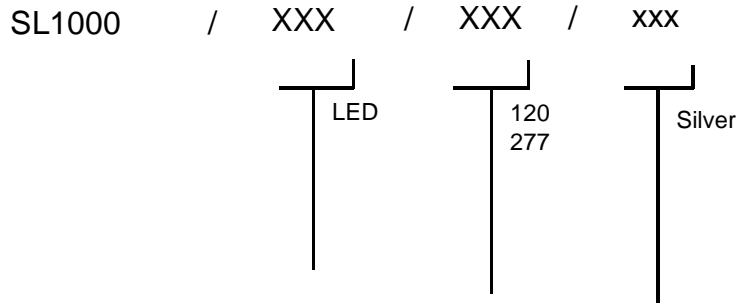

* LED has integral driver @ 120 volt or 277 volt.

Lumux - SL1000

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev :B	Drawing Number SL1000
---------------------------	---------------------	---------------	---------------------------------