

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description : Interior or exterior small step light for low mounting height illumination application. Low copper aluminum die cast housing with Grade 316 stainless steel 45 degree angled louver. Unit comes with tempered frosted glass or spread lens with translucent ceramic mask (OPTIONAL) and chemically brightened aluminum reflector for high output asymmetrical light distribution. Unit uses low voltage, 20 Watt, G4 lamp included with the product. This unit is also available in LED driven light source. ETL Listed for wet locations.

SPECIFICATION:


Housing : Low copper aluminum die cast. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.

Diffuser : Frosted glass Or Spread lens

Electrical : Voltage : 120 / 277
 Lamp: Incandescent G4 20 watt. LED
 White(warm - cool) Blue, Red, Green or Amber
 Socket : G4
 Ballast : Class P, Electronic Ballast

Installation: Unit is provided with Polymer Rough-In box. Cavity size :
 6 5/8" x 2 3/4" x 3 5/8" (L x W x D)

DIMENSIONS:

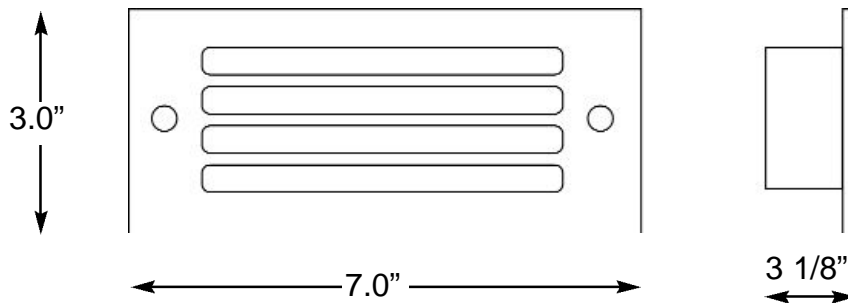

Lumux - SL332SS

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : B	Drawing Number SL332SS
--------------------	--------------	---------	---------------------------

LUMUX

Date :

Project :




Type:

Agency :

Distributor :

ORDERING GUIDE:

SL332SS / XXX / XXX / xxx



* LED comes with integral driver.

Specify LED in White (warm or cool), Blue, Red, Green and Amber

Lumux - SL332SS

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :B

Drawing Number
SL332SS