

LUMUX

Date :

Project :

Type:

Agency :

Distributor :



Description :

Stainless steel domed shaped luminaire. Perfect fixture to augment your design and to add dramatic light effect to your lighting specification. Suitable for wall or floor application. Unit could be specified with (1),(2),(3) or (4) opening aperture for light distribution. Light source is 1 watt LED which comes with its own integral driver. ETL listed for wet location.

SPECIFICATION:

Housing : Stainless steel. Silicon gasketed for weather tight operation.

Diffuser : Clear glass.


Electrical : Voltage : 120 or 277.
Lamp: LED.

Installation:

Unit is provided with its polymers Rough-in box.

Driver : Class P, Electronic Ballast

DIMENSIONS:

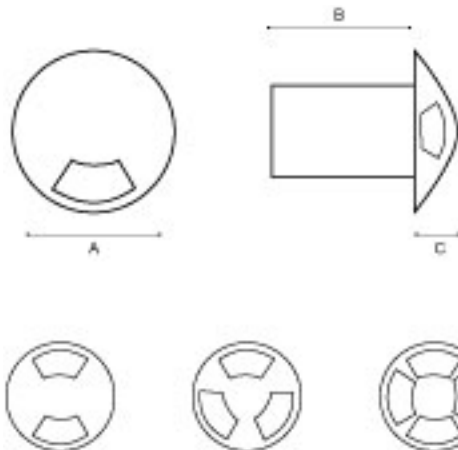

A= 3 1/2" B= 2 1/2" C= 1.0"



Lumux - PL500

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number PL500
--------------------	--------------	---------	-------------------------

LUMUX

Date :


Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

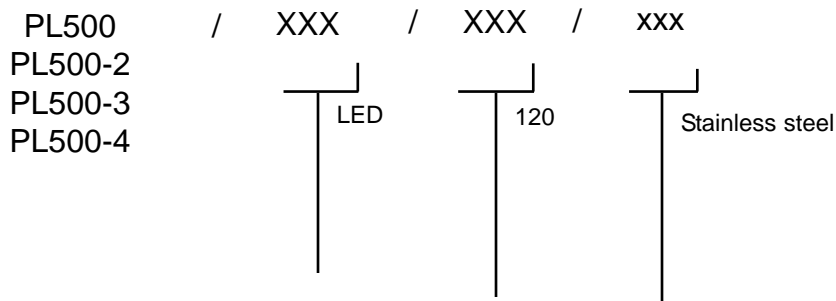

* LED has integral driver @ 120 or 277 volt

Lumux - PL500

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev :A	Drawing Number PL500
---------------------------	---------------------	---------------	--------------------------------