

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :



**Description :** ADA surface mounted luminaire for low level illumination application. Constructed from low copper aluminum die-cast. Suitable for wet locations. Tempered frosted glass diffuser. High corrosion resistant polyester powder coat finish. Vandal resistant stainless steel screws. Specify any RAL. ETL listed for wet locations.

**SPECIFICATION:**


**Housing :** Low copper aluminum die cast.  
Vandal resistance stainless steel screws.  
Silicon gasketed for weather tight operation.

**Diffuser :** Frosty glass.

**Electrical :** Voltage : 12 - 120 / 277  
Lamp: Halogen (12 volt or 120/277 volt), LED (120 volt only)  
Socket : G4 (For Halogen lamp)  
Ballast : Class P, Electronic Ballast

**Installation:**  
Unit will surface mount via (2) provided holes in the bottom of the fixture 3 1/4" diagonally seperated.

**DIMENSIONS:**

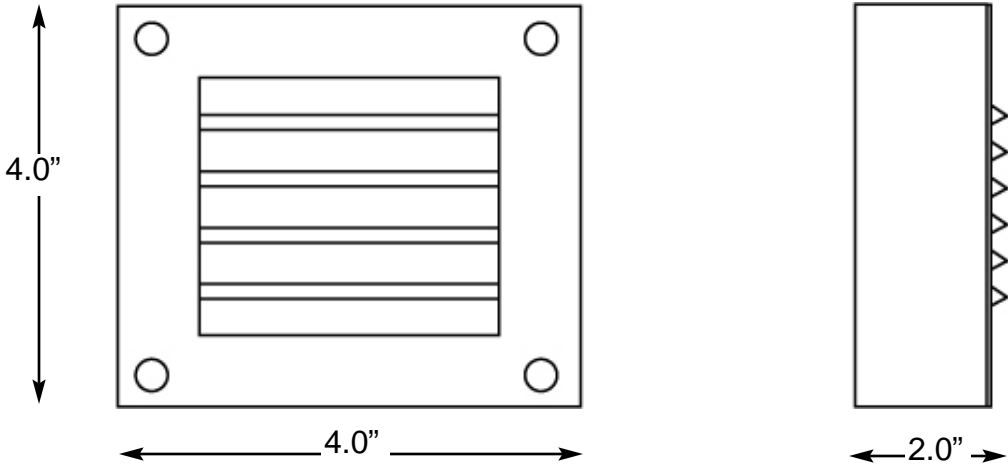

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux - SLS232

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number SLS232
--------------------	--------------	---------	--------------------------

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :

## ORDERING GUIDE:

---

SLS232 / XXX / XXX / xxx

G4  
LED \*

12v  
120  
277

White  
Black  
Silver  
Bronze  
RAL  
(optional)

\* LED has integral driver @ 120 volt

Lumux - SLS232

## PROJECT NOTES:

---

### Comments

### Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number  
SLS232