

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :



**Description :** The housing of this down light luminaire is fabricated from formed Brass or metal with tempered glass diffuser. Unit could also be specified with spread lens. Unit could be installed on any standard 3.0' or 4.0' J – Box. This unit could be utilized for illumination of pathways or perimeters of a building. Specify this unit in Compact fluorescent or Metal Halide. ETL listed for wet location.

### SPECIFICATION:



**Housing :** Formed Metal.

**Diffuser :** Frosty tempered glass.

**Electrical :** Voltage : 120 / 277  
Lamp: Incandescent T10, Compact Fluorescent, Metal Halide  
Socket : A19, G23-2, G24Q. Med. Base  
Ballast : Class P, Electronic Ballast

**Installation:** Installs on any standard 3.0" or 4.0" J-box.

### DIMENSIONS:

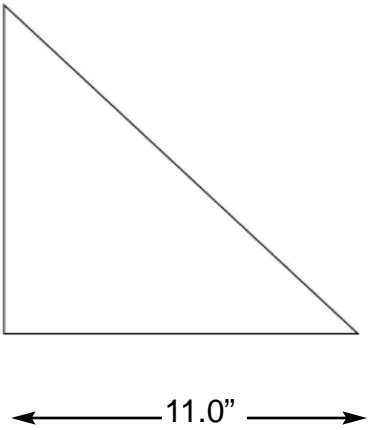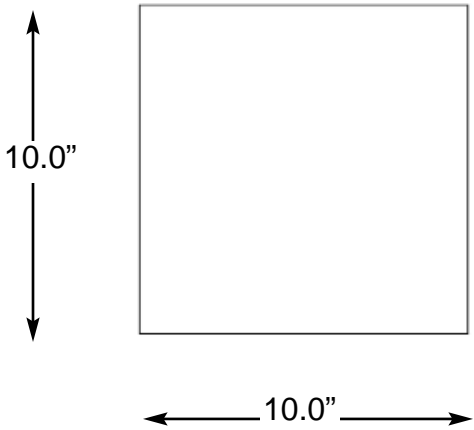

Lumux - UD600

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number UD600
--------------------	--------------	---------	-------------------------

# LUMUX

Date :

Project :

Type:

Agency :

Distributor :

## ORDERING GUIDE:

---

UD600 / XXX / XXX / xxx



T10  
PL9  
PL13  
PL18  
PL26  
PL32  
PL42  
MH39  
MH50  
MH70



120  
277



White  
Black  
Silver  
Bronze  
RAL  
(optional)

Lumux - UD600

## PROJECT NOTES:

---

### Comments

### Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

<b>Lumux Lighting Inc</b>	<b>877-895-5552</b>	<b>Rev :A</b>	<b>Drawing Number</b> UD600
---------------------------	---------------------	---------------	--------------------------------