

LUMUX

Project :	Type:
-----------	-------

Agency :

Distributor :



Description : LED Cylindrical ceiling interior down light. Unit is constructed from extruded low copper aluminum for lighting atrium, canopies and passages with symmetrical distribution. Clear glass. ETL listed.

SPECIFICATION:


Housing : Low copper aluminum . Vandal resistance stainless steel screws.

Diffuser : Clear glass.

Electrical : Voltage : 120 / 277
Lamp: CREE LED COB 21 watt
Driver : UL Listed 120/277

Installation: Refer to the mounting foot print below.

DIMENSIONS:

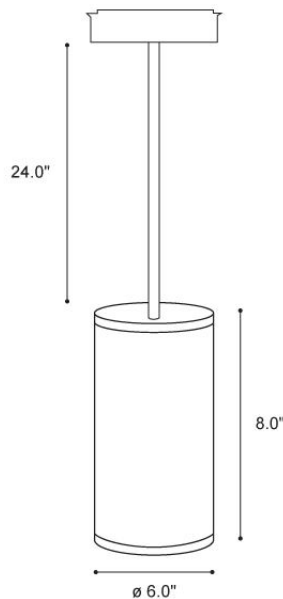

Lumux - DL200-2

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number DL200-2
--------------------	--------------	---------	---------------------------

LUMUX

Project :	Type:
-----------	-------

Agency :

Distributor :



ORDERING GUIDE:

DL200-2/LED/120/277/Finish/option

LED -CREE

Wattage	Voltage	Lumen	CRI	Temp.	B. Angle	Finish	Option
21	120/277	1808	80	4000K	24	Black White Silver Bronze RAL (optional)	Pendent 24" Or 48"

Lumux - DL200-2

PROJECT NOTES:

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc	877-895-5552	REV :A	Drawing Number DL200-2
--------------------	--------------	--------	---------------------------