


LUMUX

Project :	Type:	Agency :
Distributor :		 Complies with BUY AMERICA



Description : Low copper aluminum die cast, oval step light . Vandal resistance stainless steel screws. Fully gasketed for tight weather operation. Frosty UV rated polycarbonate diffuser. ETL listed for wet location.

SPECIFICATION:


Housing : Low copper aluminum die cast. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.

Diffuser : Frosty UV rated polycarbonate.

Electrical : Voltage : 120 / 277
CREE LED 3 watt

Installation: Unit is provided with standard cross bar bracket.

DIMENSIONS:

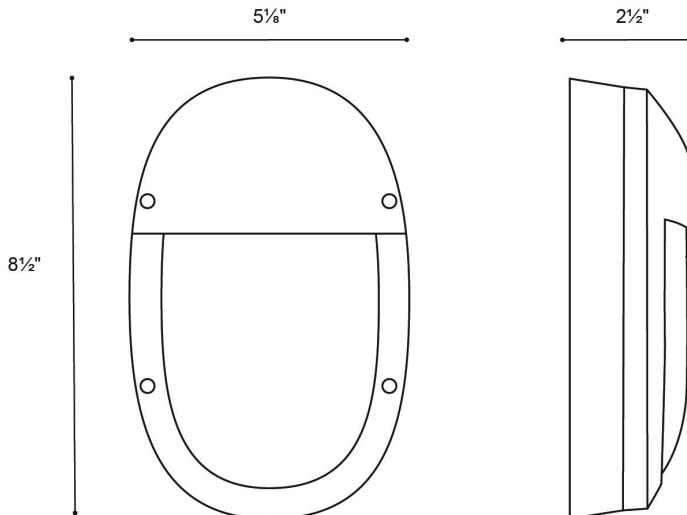

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux - SLS350

Lumux Lighting Inc	877-895-5552	Rev : A	Drawing Number SLS350
--------------------	--------------	---------	--------------------------

LUMUX

Date :

Project :

Type:

Agency :

Distributor :

ORDERING GUIDE:

SLS350/LED-color/120-277/Finish

Wattage	Voltage	Lumen	CRI	Temp.	B. Angle	Finish
6	120/277	340	70	4000K	120	Black
6	120/277	310	70	3000K	120	White
						Silver
						D. Bronze
						RAL
						(optional)

Lumux - SLS350

PROJECT NOTES:

Comments

Approval

Lumux reserves the right to modify the above details to reflect changes in the cost of materials and/or design without prior notice.

Lumux Lighting Inc

877-895-5552

Rev :A

Drawing Number
SLS350