

# Lumux Lighting

## PT2000-

This Architecturally designed luminaire merge aesthetically pleasing day time appearance with full cut off, non glare night time performance. This fully gasketed unit is fabricated from low copper aluminum die cast (1%) with vandal resistance stainless steel fastener. Polyester powder coat finish adds to the outdoor longevity application. This Post Top & Wall Mounted unit blends aesthetics and performance. This unit utilizes a hinged door with mechanical prop-rod to hold the reflector open for ease of relamping or maintenance. ETL listed for wet locations.

REV : A


Project :

Type:

Date:

Agency:

Distributor:

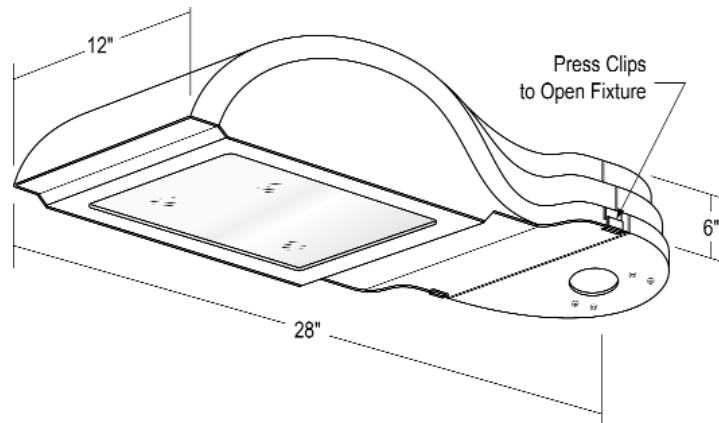

### Electrical :

Voltage: 120 / 277 V  
 Compact Fluorescent  
 Socket : G23-2, G24Q-4  
 Ballast : Class P. Electronic Ballast  
 Metal Halide : Med. Base - Mogul Base

### Construction :

Low Cooper die cast aluminum. Vandal resistance stainless steel screws. Silicon gasketed for weather tight operation.

### Diffuser:

Clear Glass

### Finish :

Polyester Powder Coat

### Installation :

Wall mount :  
 Post Top : Tenon of 3.0" in diameter by 3 1/2" in length.

### Ordering Guide:

Lamp	Voltage	Type	Finish	Options:
PT2000/ PL9-PL13	120	Wall Mount. Post top. (Height of post)	Black	
PL18	277		White	
PL26-PL32			Silver	
PL42			Bronze	
MH50- MH250			RAL- Optional	